


Acessórios de Suspensão



AC

CADDY® ERISTRUT Channel 41 x 41 x 2,5 mm

- For medium duty applications
- length 2, 3 and 6 metre
- Slotted 14x27mm every 50mm
- Surface finish: pre galvanised or hot dip galvanised



Nº	L m	AxBxS mm	P	C mm	DxE mm	H mm		kg/l
385505	2	41x41x2,5	1	22,3	14x27	50	10	5,20
310298	3	41x41x2,5	1	22,3	14x27	50	10	7,60
310311	6	41x41x2,5	1	22,3	14x27	50	10	15,60
310339	3	41x41x2,5	3	22,3	14x27	50	10	7,90
310358	6	41x41x2,5	3	22,3	14x27	50	10	15,30

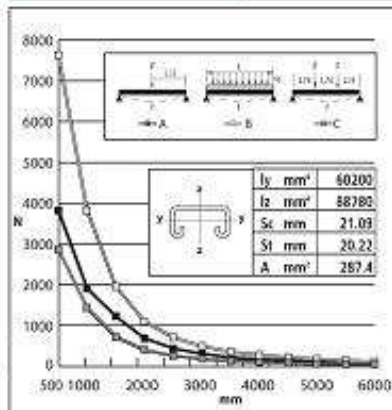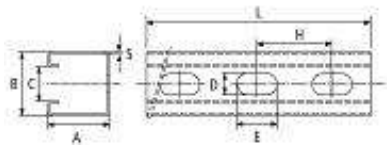




$G_{02} = 160 \text{ N/mm}$
 $f_{02} = l/200$

SBFF

sound insulator female female

- max load 1500N
- for tensil load
- temperature range -30°C up to +90°C
- Surface finish: electro zinc plated



Nº	M	Ø mm		P		kg/1
588440	8-8	39	1500	1	10	0,13
588430	6-6	39	1500	1	10	0,13



SBMF

sound insulator male female

- max load 1500N
- for tensil load
- temperature range -30°C up to +90°C
- Surface finish: electro zinc plated



Nº	M1	M2	Ø mm		P		kg/1
588560	8	8	39	1500	1	10	0,15
588570	8	10	39	1500	1	10	0,15
588580	10	10	39	1500	1	10	0,15



SGBC

Heavy duty sound insulator

- fixing holes for M18 max.
- max load 7000N
- for tensil and compressive load
- Surface finish: electro zinc plated

Nº	Ø A mm	Ø B mm		P		kg/1
588500	18,3	80	7000	1	1	1,96

